

## GEOTEXTILE-50

### DESCRIPTION

**GEOTEXTILE-50** is a non-woven geotextile, from 100% polyester fibers, manufactured with the needle punching process.

### RECOMMENDED FOR

Reinforcement of waterproofing in construction details, flashing, joints, cracks and gaps. It is suitable for either solvent based or water based liquid waterproofing systems. It is particularly recommended for PU liquid waterproofing membranes (**HYPERDESMO**)

### APPLICATION

**GEOTEXTILE-50** is applied between the two coats of **HYPERDESMO**<sup>®</sup> (particularly recommended over old bitumen membranes to prevent potential creation of future cracks).

#### Application Conditions:

- Temperature: 5-35 °C.
- Relative humidity: < 85%.

### PACKAGING

White: 1X200m rolls.

### SHELF LIFE

Keep them in cool and dry places, at temperatures of 5-25 °C.

### SAFETY INFORMATION


**GEOTEXTILE-50** is not a hazardous material.

### TECHNICAL CHARACTERISTICS

PROPERTY	UNITS	METHOD	SPECIFICATION
Weight	g/m <sup>2</sup>	EN ISO 9864	45-55
Average Tensile Strength*	KN/m	EN ISO 10319	0.8-0.9
Thickness	mm	EN ISO 9863-1	0.35-0.50
Average Elongation at Break*	%	EN ISO 10319	>40

\* Average value of machine direction and cross direction

None of our instructions and specifications in writing is binding in general and with respect to any third parties protective rights in particular, or do they relieve you of your duty to subject our products to an adequate examination with regard to their suitability.

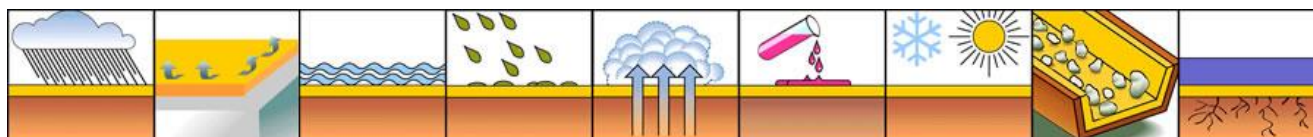

Certified quality, environmental and occupational health & safety management systems:  
ISO 9001/14001 & ISO 45001.